



Digital Yacht Solutions

Quick Start Guide

AIS Transponder with NMEA 2000 to WiFi Server

Congratulations on your Digital Yacht Solutions purchase. This quick start guide will give you the general instructions to build and install your products. However, you will need to refer to the individual product manuals for specific details.

1. What is Included:

- NavLink2 – NMEA 2000 to WiFi server
- AIT2000 or AIT2500 – Class B or B+ AIS Transponder
- VHF & GPS antennas
- NMEA 2000 Starter Kit

2. Before you start


You will need a few additional items and tools to complete the installation. Please refer to the individual product handbooks for these items.

3. Installation

For individual product installation you will need to refer to the relevant "installation" section of the products handbook.

To connect all products together as part of the same NMEA2000 network, simply connect the N2Net connectors of both the AIT2000/AIT2500 and the Navlink2 to the 4 way "T" piece backbone of the NMEA2000 Starter Kit.

The diagram below displays how the connection should look.

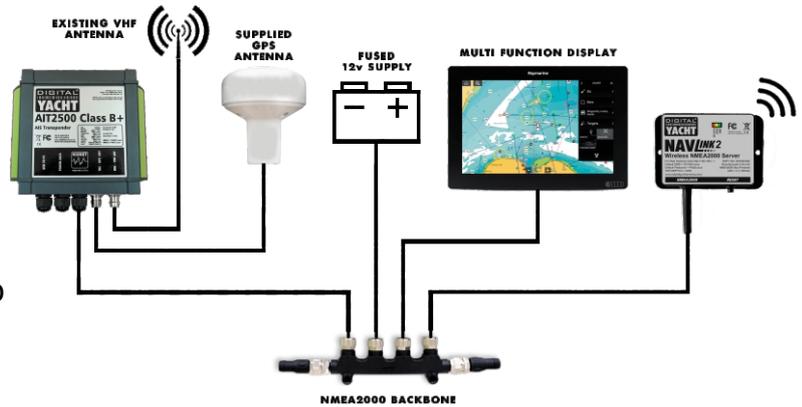

4. Configuration

Once both the AIT2000/2500 and NavLink2 have been installed they will need to be configured. Information on how to do so can again be found in the product handbooks for individual device configuration.

The product handbooks will also give further information on product operation, troubleshooting, interfacing etc as well as useful diagrams.



Products included with the AIS Transponder with NMEA 2000 to WiFi Server.