



Digital Yacht Solutions

Quick Start Guide

PC Navigation System with GPS, Wind and AIS Transponder

Congratulations on your Digital Yacht Solutions purchase. This quick start guide will give you the general instructions to build and install your products. However, you will need to refer to the individual product manuals for specific details.

1. What is Included:

- Aqua Compact Pro PC
- 23.5" LCD display
- AIT2000 - Class B AIS Transponder
- WND100 Wind Transducer
- USB to NMEA0183 adaptor

2. Before you start

You will need a few additional items and tools to complete the installation. Please refer to the individual product handbooks for these items.

3. Installation


For individual product installation you will need to refer to the relevant "installation" section of the products handbook.

To install the WND100 Wind transducer, you will need to interface this with the NMEA0183 input on the PWR/DATA cable.

Secondly, you will connect the AIT2000 directly to the Aqua Compact Pro via the supplied bi-directional NMEA0183 to USB adaptor.

The LCD display is mounted below deck and plugs in to the HDMI port of the PC.


The diagram below displays how the connection should look.

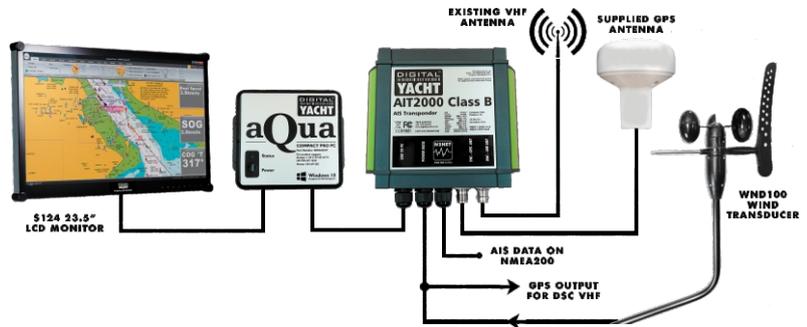

4. Configuration

Once the AIT2000 has been installed it will need to be configured. Information on how to do so can again be found in the product handbooks for individual device configuration.

The product handbooks will also give further information on product operation, troubleshooting, interfacing etc as well as useful diagrams.

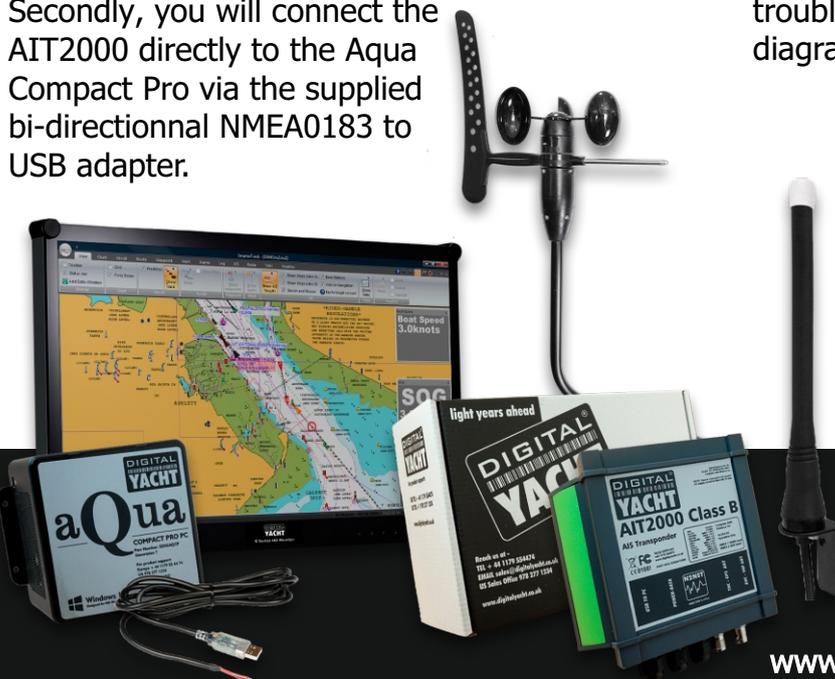

Products included with the PC Navigation System with GPS, Wind and AIS Transponder.